


LIVELLOSTATO VISIVO IMN OP-EL PVC

LIVELLOSTATO VISIVO

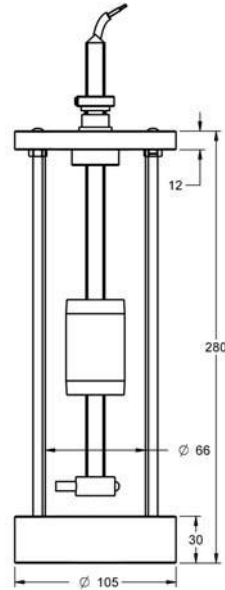

Connessione al processo	Con filetto femmina 3/4" G.
Flangia chiusa	Aluminio
Vetro	Ø 66 mm. Pyrex
Connessione elettrica	Cavo in silicone /
N° contatti	PVC 1..3
Tipo di contatto	NO:80 WVA / 250 VAC-2A · NO-NO/NC:60 WVA / 250 VAC-2A
Temperatura	-10..+60°C
Pressione	3 kg/cm ²
Densità	0,65 g/cm ³
Galleggiante	Standard: tipo FCPP04M14, Ø 29x50 mm. PP (See table 1).
Lunghezza	100..2000 mm.
Protezione	Standard: IP 65. (Altre opzioni vedi su tabella 2).

Table 1: Floats

Type	FCPP04M14	FCPP05M18
Dimensions (mm)	Ø 29x50	Ø 38x60
Pressure (kg/cm ²)	3	3
Density (g/cm ³)	e > 0,6	e > 0,5
Figure		

Table 2: Cables

Standard	Normal construction, without any internal filling.
Protected	Filled with anticondensation gel.
Insulated	Filled with epoxy resine, flexible.

Ordering code

IMN OP-EL PVC - V P F L C N

Version	Standard	1
	Protected	2
	Insulated	3
Connect. process	3/4" G 05	
Float	FCPP04M14 55	
	FCPP05M18 57	
	Total length (LT) (mm)	
	Number of contacts	1-3
	Number of floats	1-2

To compose the reference, choose one option of each cell.
Example: **IMN OP-EL PVC V1 P05 F55 L500 C2 N1**